



Gruen is the global partner of Evimetal.

Excellent details, smart solutions...

Evimetal Design Center





2023-2024 Product Catalogue






Ismail Altunc: Founder 1967

- Evimetal, Turkey's first manufacturer of Inox bathroom products and also the sector leader for many years, has a design center accredited by the Ministry of Industry and Technology.
- This long journey, which started in Istanbul in 1967, has turned into a deep-rooted, strong and constantly developing culture in product design, mold making and manufacturing.
- Evimetal comes up with the solutions to the most complex and special needs of all users by offering more than 3000 alternative products with more than 100 models, 9 different colors and surface options in shower channels, drains, corner-finish profiles and towel radiators.
- Evimetal also offers individual solutions to the consumers, as it has of a fully integrated factory that is constantly developing.
- The company has many advantages provided by its 56 years of experience and well-organized, qualified production force.
- Its R&D team of 12 designers and engineers who won prizes at national and international competitions, its specialized sales team, and references are the driving force behind Evimetal's success.
- As it has its own designers, Evimetal is able to solve any kind of problems beforehand and also manufactures products that are high-quality and cost-effective.
- Quality of the products are guaranteed by its qualified production force, its state-of-the-art machinery, and 1st class stainless-steel having the V2A quality certificate.
- Products approved by TÜV-Germany that conform with the EN-1253 and CE standards represent the quality mentality of Evimetal.
- As a precaution to the global logistics problems, Evimetal has created production centers in Turkey and Europe. It aims to meet the demands of different markets of the world by offering them a wide product range at different production locations.
- Its market share and reputation has encouraged and motivated Evimetal to expand into the global market. Evimetal and its group companies export to all European countries, North America, MENA region, Caucasus and Central Asian countries.
- By this strategic decision, Evimetal has unconditionally assumed the responsibility of
 offering and timely delivering its qualifed products meeting the international standards at
 the best rates and in the best conditions to the construction sector, its network of global
 dealers and distributors.
- Evimetal offers unconditional customer satisfaction to all its customers with its modern solutions.
- Evimetal has taken an important step towards becoming a global actor in the bathroom
 products sector by combining its deep-rooted experience and its strength as a sector
 leader with Gruen who is an innovative brand of Germany in the shower drain systems
 and profiles sector, in 2021.







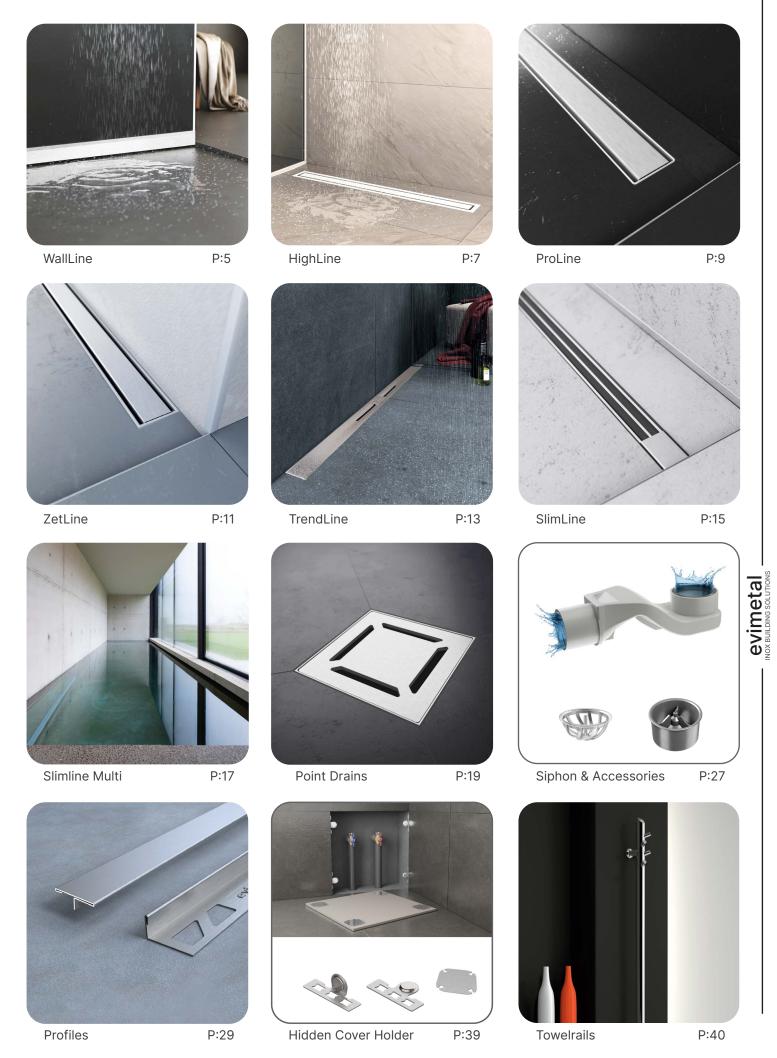













Stainless Steel



High Drain Capacity



Easy Cleaning



Cuttable


WallLine, the first patented wall drain cut to suit the projects' needs, has crowned its success with design awards. Having won the 2017 Design Turkey Best Design Award, WallLine also received the IF Design Award, one of the most prestigious design awards in Germany and The World. WallLine wall drains offer a neat appearance, an uninterrupted view from wall to wall, and functionality.



Eccentric flange with integrated membrane and height-adjustable fixing parts, compatible with your floor and wall insulation.

In-Wall Built-in Tank

In-wall built-in tank offers you more durable and easier mounting thanks to its patented eccentric adjusting flange. It can be used with different covering materials up to 30 mm thickness.






Hair trap in the inner tank can be cleaned easily.




It can be cut and adapts to any desired size between 30-100 cm.



It is safe to use thanks to water sealing closure piece.

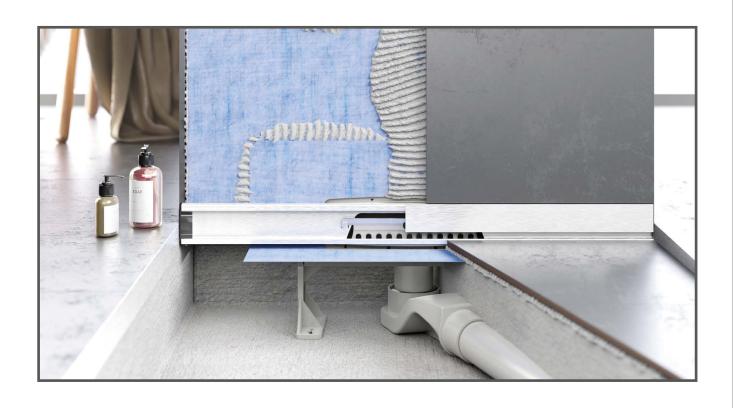

Imperia	Siphon		60 cm	100 cm
	Side Outlet	atin	W1H24L60S1	W1H24L100S1
	Vertical Outlet	S	W1V24L60S1	W1V24L100S1

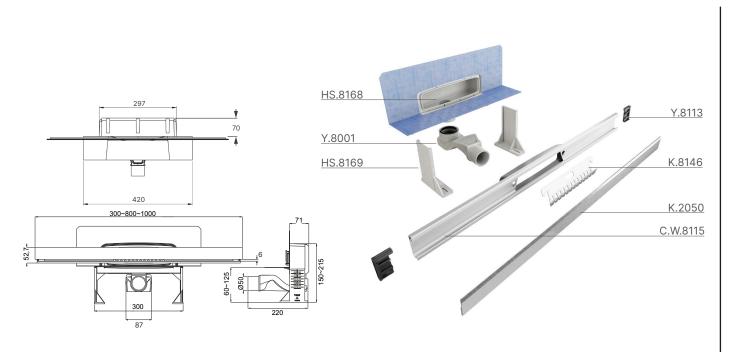

^{*}For detailed information on accessories used in the product, please see pages 27-28. *Please contact our sales consultant for different sizes and alternatives. *VAT is not included to the unit prices.





Stainless Steel



Sloped & Weldless Body




High Drain Capacity




Easy Cleaning

Well-Thought-Out Details, High Standards

HighLine easily meets the expectations of high standards and hygiene enthusiasts. Impressive with its cover and frame having sharp edges with a 3 mm solid body, HighLine has a flawless appearance, quality craftsmanship and original design. Its high strength and morphed internal structure prevent accumulation of dirt, while its high capacity flow rate meets all of your discharge expectations.

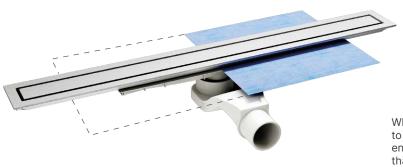


While its morphed internal structure makes it easier to discharge under-tile water leakage, it also ensures safety against under-tile water leakage thanks to its flange with textile laminated on the tank. It is also compatible with all your insulation materials.





Hair Trap Please refer to the accessories page for details.




Cover and frame with a 3 mm solid body having sharp-edges





Massive	Siphon		50 cm	60 cm	70 cm	80 cm
	Side Outlet	atin	H1H24L50S1	H1H24L60S1	H1H24L70S1	H1H24L80S1
	Vertical Outlet	Ś	H1V24L50S1	H1V24L60S1	H1V24L70S1	H1V24L80S1

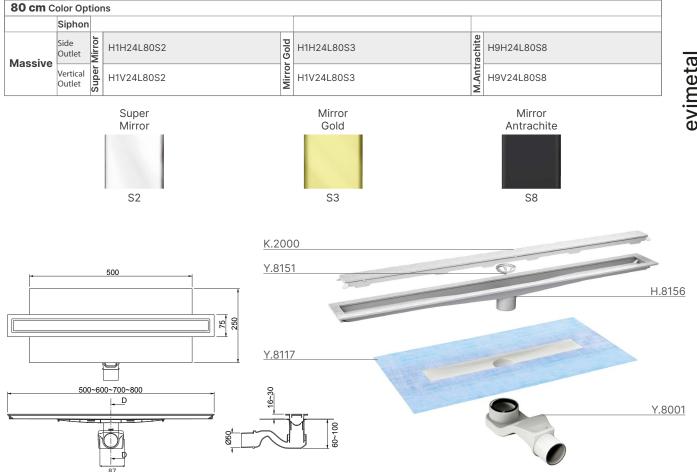

^{*}For detailed information on accessories used in the product, please see pages 27-28. *Please contact our sales consultant for different sizes and alternatives. *VAT is not included to the unit prices.

ProLine



Stainless Steel



Reversible Cover



High Drain Capacity



Easy Cleaning



Gradual Height Adjustment Set


Professional Solution

Proline is professional solution for your projects, the metal tank structure of different lengths up to 120 cm ensures that it is firmly locked into the concrete and serves for a long lasting usage. With its gradual height adjustment piece, it allows you to make the desired height adjustment on the leveling concrete according to your project. While its insulation membrane laminated into the steel tank guarantees impermeability, it also conforms with all of your insulation materials. With its ceramic and marble cover options, you achieve the sense of wholeness in your bathroom and shower area.




While the steel tank that has equal length with the cover, and its morphed internal structure make it easier to discharge under-tile water leakage, it also ensures safety against under-tile water leakage thanks to its flange with textile laminated on the tank. It is also compatible with all your insulation materials.




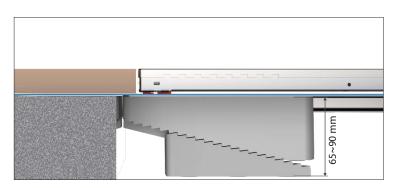

Lower EPS parts ensure convenience in leveling the ground at different heights (65~95 mm).




*Allows surface alignment with thin ceramic-marble by reducing the height of the internal part (8~18 / 18~30 mm).

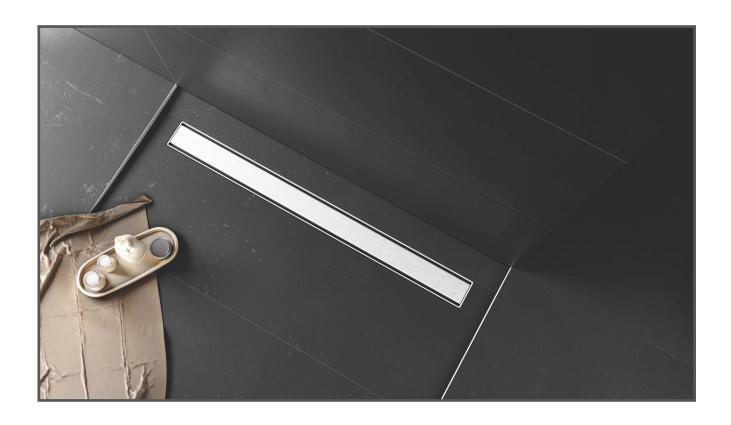

Nova	Siphon	40 cm	50 cm	60 cm	70 cm
	Side Outlet	P1H24L40S1	P1H24L50S1	P1H24L60S1	P1H24L70S1
	Vertical Outlet	P1V24L40S1	P1V24L50S1	P1V24L60S1	P1V24L70S1
		ati			
		80 cm	90 cm	100 cm	120 cm
	Side Outlet	P1H24L80S1	P1H24L90S1	P1H24L100S1	P1H24L120S1
	Vertical Outlet	P1V24L80S1	P1V24L90S1	P1V24L100S1	P1V24L120S1

Quadra			50 cm	60 cm	70 cm
	Side Outlet	atin	P4H24L50S1	P4H24L60S1	P4H24L70S1
	Vertical Outlet	0,	P4V24L50S1	P4V24L60S1	P4V24L70S1

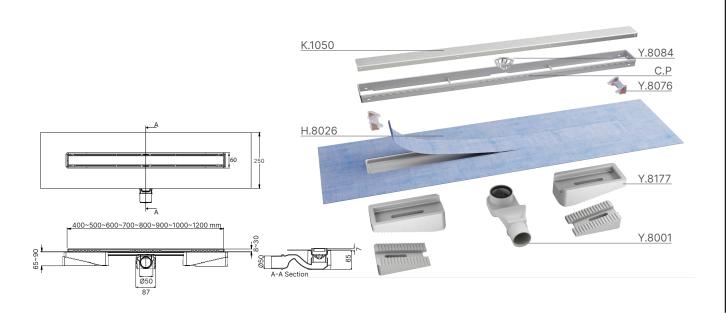

^{*}For detailed information on accessories used in the product, please see pages 27-28. *VAT is not included to the unit prices.

ZetLine



Easy Levelling



Stainless Steel



Reversible Cover



High Drain Capacity



Easy Cleaning



Sloped & Weldless Body

Designed for maximum hygiene

ZetLine draws attention with its framed and morphed steel tank. While the morphed internal structure increases the discharge capacity, it also allows dirt accumulated in the tank to flow into the plumbing. Also, its simple internal structure makes it easy to clean. As a levelled shower channel, it is suitable for ceramic-marble coating inside the cover. The hair & dirt trap inside the tank allows fast and practical cleaning to ensure a continuous usage.




While its morphed internal structure makes it easier to discharge under-tile water leakage, it also ensures safety against under-tile water leakage thanks to its flange with textile laminated on the tank. It is also compatible with all your insulation materials.





Hair Trap Please refer to the accessories page 28 for details.










For double-sided use, ceramic-marble cut to size is placed inside the top cover. With this double function, surface and drain are levelled.



Nova	Sifon		40 cm	50 cm	60 cm	70 cm	80 cm	90 cm
	Side Outlet	atin	Z1H24L40S1	Z1H24L50S1	Z1H24L60S1	Z1H24L70S1	Z1H24L80S1	Z1H24L90S1
	Vertical Outlet	S	Z1V24L40S1	Z1V24L50S1	Z1V24L60S1	Z1V24L70S1	Z1V24L80S1	Z1V24L90S1
Unica								
	Side Outlet	ti	Z2H24L40S1	Z2H24L50S1	Z2H24L60S1	Z2H24L70S1	Z2H24L80S1	Z2H24L90S1
	Vertical Outlet	Sai	Z2V24L40S1	Z2V24L50S1	Z2V24L60S1	Z2V24L70S1	Z2V24L80S1	Z2V24L90S1

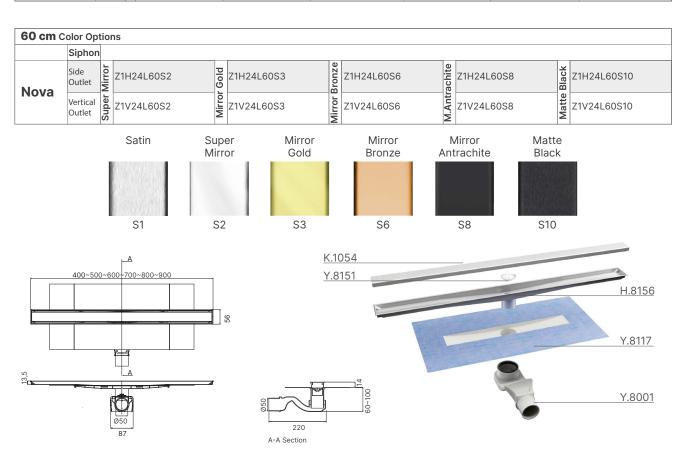

^{*}Different color options are only available for 60 cm products. Please contact our sales consultant. *Matte black: It is a paint application on the stainless surface. *VAT is not included to the unit prices.











Easy Levelling


Stainless Steel

Capacity

Easy Cleaning

Self Tilting Cover

TrendLine shower channel, which is an extremely hygienic and patented product that can be easily used for bathing areas, is designed for those who want easy application and healthy solutions in modern bathing areas. Like any other shower channels of Evimetal that can be conveniently used in front of a wall or in the center of a shower area, TrendLine shower channel can be cut in desired size and used wall-to-wall. With the TrendLine self-tilting cover, the water flows easily into the drain system. You only need to wipe the cover surface with a damp cloth.

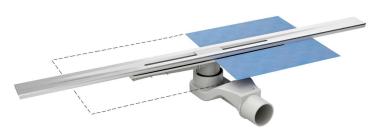

While its morphed internal structure makes it easier to discharge under-tile water leakage, it also ensures safety against under-tile water leakage thanks to its flange with textile laminated on the tank. It is also compatible with all your insulation materials.









Hair Trap


Hair and undesired pieces are trapped thanks to the hair trap. It is extremely easy to remove and clean.

It can be cut and adapted to any desired size between 60-100 cm.

Thanks to its self-inclined cover design, water can easily fall into the drain and be discharged.



TrendLine	Siphon	60 cm	80 cm	100 cm
	Side Outlet	₹T1H24L60S1	T1H24L80S1	T1H24L100S1
	Vertical Outlet	T1V24L60S1	T1V24L80S1	T1V24L100S1

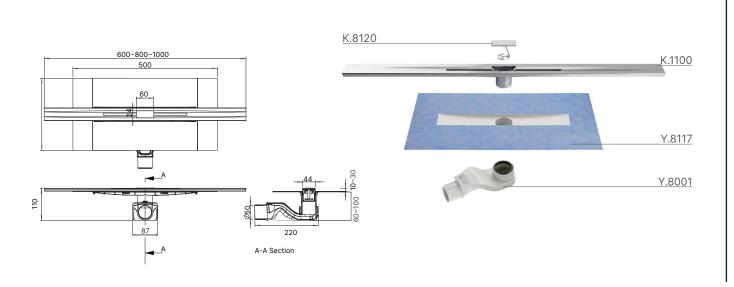

SlimLine





Steel







Easy Levelling

High Drair Capacity

Easy Cleaning

Cuttable

High Discharge Capacity

SlimLine slot shower channels, despite their slim bodies, handle with large amount of water due to large shower heads and rainfall type shower systems. Water flows easily under your feet. Cover and body structure in different sizes, compatible with siphons with high discharge capacity, are produced to provide the most suitable solution for your projects. It provides easy assembly with its central outlet body and 360 degree rotating siphon structure.












SlimLine product line has 100-200 and 300 cm options, can be cut according to desired size, and offers tailor-made usage in your projects thanks to its application diversity. The insulating finished body and the solid metal body with an integrated insulation band are designed to withstand heavy conditions and meet high flow rates.

It offers precise working according to different height settings with its apparatus compatible with the leveling heights (h: 60~100 mm).

Linea Metal Cover Norma Slot Cover Natura

Sipnon Mi	dale Sho	wer Usage					
Norma	Siphon	60 cm	80 cm	100 cm	150 cm	200 cm	300 cm
	Side Outlet	S1H116L60S1	S1H116L80S1	S1H116L100S1	S1H116L150S1	S1H116L200S1	
	Vertical Outlet	S1V126L60S1	S1V126L80S1	S1V126L100S1	S1V126L150S1	S1V126L200S1	
Linea							
	Side Outlet	S2H116L60S1	S2H116L80S1	S2H116L100S1	S2H116L150S1	S2H116L200S1	S2H116L300S1
	Vertical Outlet	S2V126L60S1	S2V126L80S1	S2V126L100S1	S2V126L150S1	S2V126L200S1	S2V126L300S1
Natura			*For Natura	Cover; 2 pieces of P	RF 100 or PRF 400 p	rofile covering materi	al should be ordered.
	Side Outlet	S3H116L60S1	S3H116L80S1	S3H116L100S1	S3H116L150S1	S3H116L200S1	S3H116L300S1
	Vertical Outlet	S3V126L60S1	S3V126L80S1	S3V126L100S1	S3V126L150S1	S3V126L200S1	S3V126L300S1

Siphon Si	de Balcon	y and Terrace U	Jsage				
Norma							
	Side Outlet	S1H175L60S1	S1H175L80S1	S1H175L100S1	S1H175L150S1	S1H175L200S1	
	Vertical Outlet	S1V175L60S1	S1V175L80S1	S1V175L100S1	S1V175L150S1	S1V175L200S1	
Linea							
	Side Outlet	S2H175L60S1	S2H175L80S1	S2H175L100S1	S2H175L150S1	S2H175L200S1	S2H175L300S1
	Vertical Outlet	S2V175L60S1	S2V175L80S1	S2V175L100S1	S2V175L150S1	S2V175L200S1	S2V175L300S1
Natura			*For Natu	ıra Cover; 2 pieces of	PRF 100 or PRF 400	profile covering mat	erial should be ordered
	Side Outlet	S3H175L60S1	S3H175L80S1	S3H175L100S1	S3H175L150S1	S3H175L200S1	S3H175L300S1
	Vertical Outlet	S3V175L60S1	S3V175L80S1	S3V175L100S1	S3V175L150S1	S3V175L200S1	S3V175L300S1

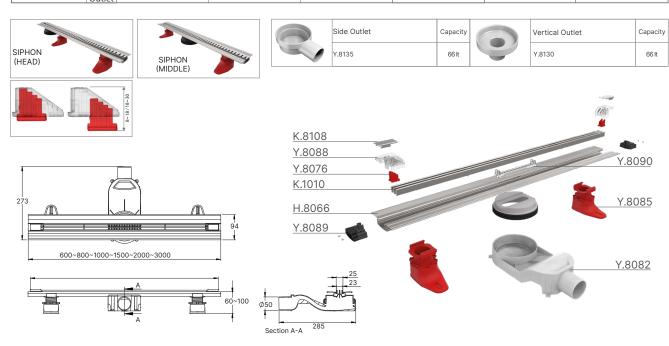

^{*}Norma, Linea and Natura product codes are given as satin color codes.

*Y.8135 and Y.8130 siphons are optionally available on balconies and terraces when they are directly connected to the rain drain.

*Please contact our sales consultant for different siphon options.

*VAT is not included to the unit prices.













Easy Levelling


Multi Solutions

Stainless Steel

High Drain Capacity


Easy Cleaning

Cuttable





Slimline Mutli Example Usage

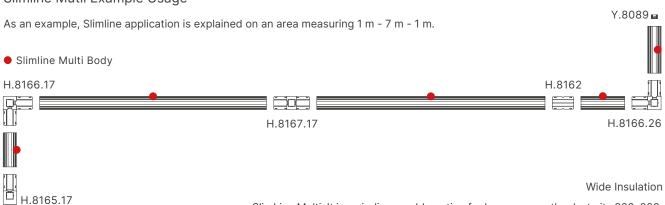

SlimLine Multi; It is an indispensable option for large spaces thanks to its 300, 200, 100 and 50 cm standard sizes and modular parts. The isolation tape that we offer as a standard to the collared metal body surface can be easily integrated, and it is also designed to withstand heavy conditions and meet high flow rates.



	Natura Cover and Frame							
•								
Dimension	50 cm	100 cm	200 cm	300 cm				
Code	SMS3501	SMS31001	SMS32001	SMS33001				

*For Natura Cover; 2 pieces of PRF 100 or PRF 400 profile covering material should be ordered.

PRF 100	10 mm	12 mm	14 mm	22 mm
Satin	S.I PRF.100.10.2500.1.S.I	PRF.100.12.2500.1.S.I	PRF.100.14.2500.1.S.I	PRF.100.22.2500.1.S.I
PRF 400				
Satin	S.I PRF.400.10.2500.1.S.I	PRF.400.12.2500.1.S.I	PRF.400.14.2500.1.S.I	PRF.400.22.2500.1.S.I

^{*}Please contact our sales consultant for different configuration options.

^{*}VAT is not added to the product unit prices.



With its cuttable structure to the desired length, it provides a variety of ap plications and special use according to your projects.




It offers precise working according to different height settings with its elevating apparatus compatible with screed heights (h: $60 \sim 100$ mm).

				I			
Corner	with Outlet		Side wit	h Outlet	Middle with Outle	i	
H.	H.8166.17			65.17	H.8167.17		
Corner without Outlet			Piece for l	_eak Proof	Connecor		
H.:	8166.26		Y.8	089	H.8162		
	Direct Outlet (Side)		Capasity		Direct Outlet(Vertical)	Capasity	
	Y.8135		66 lt		Y.8130	66 lt	
8	Odorless S Siphon (Side) It is suitable for indoor.		Capasity	8	Odorless S Siphon (Vertical) It is suitable for indoor.	Capasity	
	Y.8001		48 lt		Y.8002 65		





Point Drain with Insulation Flange

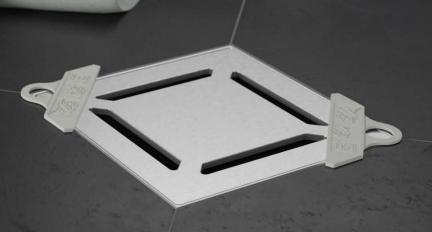

















HighDrain Capacity

Easy Levelling

Stainless Steel

Articulated Head Alignment Adjustment

Reversible Cover

Easy Cleaning

Easy **Levelling Part**


Patented Easy Levelling **Apparatus**

Point Drains with Insulation Flange

It is designed for general usage areas that are compatible with different application heights and require low application height with its compact body structure. Anti-odor trap with integrated sealing gasket prevents odor leaks. Its bucket offers easy cleaning and practical use by preventing the wastes such as hair, dirt, soap that may occur during cleaning from clogging the drain. Our product is offered as plastic frame and metal frame.







The tank connected to the plumbing may not always be connected in parallel to the discharge concrete. Since the frame is placed on this structure, all the problems on the ground are reflected on the cover. Custom-made patented articulated system ensures that regardless the number of defects in the lower part, it is corrected




Anti-odor trap and cleaning bucket with integrated sealing gasket



While its morphed internal structure makes it easier to discharge under-tile water leakage, it also ensures safety against under-tile water leakage thanks to its flange with textile laminated on the tank. It is also compatible with all your insulation materials.





Convenient surface alignment tool, frame, and articulated tank, the tile height is easily and quickly aligned. After completing the adhesion, hold the round ring and tear it off. Torn pieces can be recycled.

				Colors	Side Outlet	Vertical Cutlet		
				Colors Satin	Side Outlet PPD1H17L10S1	Vertical Outlet PPD1V17L10S1		
				Super Mirror	PPD1H17L10S1	PPD1V17L10S1		
				Mirror Gold	PPD1H17L10S3	PPD1V17L10S3		
				Satin Gold	PPD1H17L10S4	PPD1V17L10S4		
			Plastic Frame	Shine	PPD1H17L10S5	PPD1V17L10S5		
				Mirror Bronze Satin Bronze	PPD1H17L10S6 PPD1H17L10S7	PPD1V17L10S6 PPD1V17L10S7		
				M.Antrahite	PPD1H17L10S7	PPD1V17L10S7		
		10 × 10 cm		S.Antrahite	PPD1H17L10S9	PPD1V17L10S9		
a		10 × 10 cm		Satin	PSD1H17L10S1	PSD1V17L10S1		
Unica				Super Mirror	PSD1H17L10S2	PSD1V17L10S2		
ວັ∣				Mirror Gold	PSD1H17L10S3	PSD1V17L10S3 PSD1V17L10S4		
_			Metal Frame	Satin Gold Shine	PSD1H17L10S4 PSD1H17L10S5	PSD1V17L10S4 PSD1V17L10S5		
			Wetarrame	Mirror Bronze	PSD1H17L10S6	PSD1V17L10S6		
				Satin Bronze	PSD1H17L10S7	PSD1V17L10S7		
				M.Antrahite	PSD1H17L10S8	PSD1V17L10S8		
				S.Antrahite	PSD1H17L10S9	PSD1V17L10S9		
			Plastic Frame	Satin Shine	PPD1H17L15S1 PPD1H17L15S5	PPD1V17L15S1 PPD1V17L15S5		
		15 × 15 cm		Satin	PSD1H17L15S5	PSD1V17L15S5		
			Metal Frame	Shine	PSD1H17L15S5	PSD1V17L15S5		
				Satin	PPD2H17L10S1	PPD2V17L10S1		
			Plastic Frame	Super Mirror	PPD2H17L10S2	PPD2V17L10S2		
				Mirror Gold	PPD2H17L10S3	PPD2V17L10S3		
		10 × 10 cm	10 × 10 cm	10 × 10 cm		Matte Black Satin	PPD2H17L10S10 PSD2H17L10S1	PPD2V17L10S10 PSD2V17L10S1
Nova					Super Mirror	PSD2H17L10S1	PSD2V17L10S1	
9						Metal Frame	Mirror Gold	PSD2H17L10S3
_	'			Matte Black	PSD2H17L10S10	PSD2V17L10S10		
			Plastic Frame	Satin	PPD2H17L15S1	PPD2V17L15S1		
		15 × 15 cm	1 lastic i fame	Super Mirror	PPD2H17L15S2	PPD2V17L15S2		
			Metal Frame	Satin Super Mirror	PSD2H17L15S1 PSD2H17L15S2	PSD2V17L15S1 PSD2V17L15S2		
				Satin	PPD3H17L10S1	PPD3V17L10S1		
	10		Plastic Frame	Super Mirror	PPD3H17L10S2	PPD3V17L10S2		
			Flastic Flairie	Mirror Gold	PPD3H17L10S3	PPD3V17L10S3		
		10 × 10 cm		Matte Black	PPD3H17L10S10	PPD3V17L10S10		
<u> </u>				Satin Super Mirror	PSD3H17L10S1 PSD3H17L10S2	PSD3V17L10S1 PSD3V17L10S2		
Aqua			Metal Frame	Mirror Gold	PSD3H17L10S2	PSD3V17L10S2		
⋖				Matte Black	PSD3H17L10S10	PSD3V17L10S10		
			Diagtic France	Satin	PPD3H17L15S1	PPD3V17L15S1		
		15 × 15 cm	Plastic Frame	Super Mirror	PPD3H17L15S2	PPD3V17L15S2		
			Metal Frame	Satin Super Mirror	PSD3H17L15S1 PSD3H17L15S2	PSD3V17L15S1 PSD3V17L15S2		
<u>a</u>	133	10 × 10 cm	Ceramic Insert Frame	Satin	PSD6H17L10S1	PSD6V17L10S1		
Natura								
ž		15 × 15 cm	Ceramic Insert Frame	Satin	PSD6H17L15S1	PSD6V17L15S1		
				النصنا	النظيل	ينكار الكار		
Satin			Satin Shine		Satin Mirror	Satin Matte		
S1	Mirro		Gold S5	Bronze	Bronze Antrahit			
	S2	S3	S4	S6	S7 S8	S9 S10		
T		Plastic Frame Y.8203	Inox F	Frame H.8168	*Side Outlet Y.8193	*Vertical Outle Y.818		
		1.8203		H.8108	1.8193	1.818		
					Y.8197	-		
						K.050		
	4	250			Y.8163			
	H 10	00~150			Y.8182			
				10~22		H.8168		
	AT (000	ÎA 60	Ø20 Ø20				
			A-A Section			Y.8193		
			A A Section			1.0100		

S Siphon Point Drain





HighDrain





Steel



Ability to set









Capacity


Reversible Easy Cover Cleaning


sy Easy ning Levelling Part

Patented Easy art Levelling Apparatus

Point Drain with S Siphon

Floor drains attract attention with their ultra thin frames, aesthetical appearance, easy application, and safe body. It guarantees impermeability thanks to the minimal side outlet siphon with an insulating membrane. It prevents odors with its S structure forming a water curtain. With its spiral-shaped hair trap, it offers you great comfort while minimizing maintenance and cleaning times. In addition to different inox cover options to be positioned in thin frames suitable for different heights and surfaces, it enables excellent solutions to be produced with the option that allows the tile piece to be placed in the frame. Our product is offered as metal frame.







Articulated Tank; it eliminates the errors that occur during the coating between the tank and the surface.

While its morphed internal structure makes it easier to discharge under-tile water leakage, it also ensures safety against under-tile water leakage thanks to its flange with textile laminated on the tank. It is also compatible with all your insulation materials.







With the surface alignment apparatus, the height of the tile and the height of the point floor drain are easily and quickly aligned. After fixing the tile and the floor drain using an adhesive, pluck off the round ring. You can dispose of the plucked piece.

				Colors	Side Outlet	Vertical Outlet
				Satin	SSD1H24L10S1	SSD1V24L10S1
				Super Mirror	SSD1H24L10S2	SSD1V24L10S2
				Mirror Gold	SSD1H24L10S3	SSD1V24L10S3
				Satin Altın	SSD1H24L10S4	SSD1V24L10S4
		10 × 10 cm	Metal Frame	Shine	SSD1H24L10S5	SSD1V24L10S5
Unica				Mirror Bronze	SSD1H24L10S6	SSD1V24L10S6
ΙΞ	11:11			Satin Bronze	SSD1H24L10S7	SSD1V24L10S7
J				M.Antrahite	SSD1H24L10S8	SSD1V24L10S8
				S. Antrahite	SSD1H24L10S9	SSD1V24L10S9
		45 45		Satin	SSD1H24L15S1	SSD1V24L15S1
		15 × 15 cm	Metal Frame	Shine	SSD1H24L15S5	SSD1V24L15S5
			Metal Frame	Satin	SSD2H24L10S1	SSD2V24L10S1
ெ		10 × 10 cm		Super Mirror	SSD2H24L10S2	SSD2V24L10S2
>				Mirror Gold	SSD2H24L10S3	SSD2V24L10S3
Nova				Matte Black	SSD2H24L10S10	SSD2V24L10S10
		15 × 15 cm	Metal Frame	Satin	SSD2H24L15S1	SSD2V24L15S1
				Super Mirror	SSD2H24L15S2	SSD2V24L15S2
			Metal Frame	Satin	SSD3H24L10S1	SSD3V24L10S1
		10 × 10 cm		Super Mirror	SSD3H24L10S2	SSD3V24L10S2
Ĕ				Mirror Gold	SSD3H24L10S3	SSD3V24L10S3
Aqua				Matte Black	SSD3H24L10S10	SSD3V24L10S10
1		15 × 15 cm	Metal Frame	Satin	SSD3H24L15S1	SSD3V24L15S1
			Wictari Tame	Super Mirror	SSD3H24L15S2	SSD3V24L15S2
Natura		10 × 10 cm	Ceramic Insert Frame	Satin	SSD6H24L10S1	SSD6V24L10S1
Nat		15 × 15 cm	Ceramic Insert Frame	Satin	SSD6H24L15S1	SSD6V24L15S1







Super Mirror S2



Mirror Gold S3



Satin Gold S4





Mirror Bronze S6 Shine S5



Satin Bronze S7




Mirror Antrahite S8



Satin Antrahite S9




Matte Black S10





Classic Point Drain

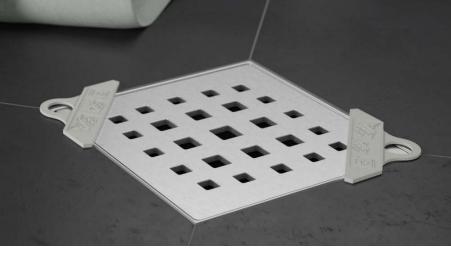





Articulated Head









HighDrain Capacity

Easy Levelling

Stainless Steel

Articulated Head Alignment Adjustment

Reversible Cover

Easy Cleaning

sy Easy ning Levelling Part

Fasy Patented Easy ling Part Levelling Apparatus


Classic Type Point Drain


It is designed for general usage areas that are compatible with different application heights and require low application height with its compact body structure. Anti-odor trap with integrated sealing gasket prevents odor leaks. Its bucket offers easy cleaning and practical use by preventing the wastes such as hair, dirt, soap that may occur during cleaning from clogging the drain. Our product is offered as plastic frame and metal frame.



Anti-odor trap and cleaning bucket with integrated sealing gasket







Convenient surface alignment tool, frame, and articulated tank, the tile height is easily and quickly aligned. After completing the adhesion, hold the round ring and tear it off. Torn pieces can be recycled.

				Renkler	Side Outlet	Vertical Outlet
				Satin Super Mirror	KPD1H17L10S1 KPD1H17L10S2	KPD1V17L10S1 KPD1V17L10S2
				Mirror Gold	KPD1H17L10S2	KPD1V17L10S2
			Plastic Frame	Satin Gold	KPD1H17L10S4	KPD1V17L10S4
			Flastic Frame	Shine	KPD1H17L10S5	KPD1V17L10S5
				Mirror Bronze	KPD1H17L10S6	KPD1V17L10S6
				Satin Bronze	KPD1H17L10S7	KPD1V17L10S7
				M.Antrachite	KPD1H17L10S8	KPD1V17L10S8
		10 × 10 cm		S.Antrachite	KPD1H17L10S9	KPD1V17L10S9
Unica				Satin	KSD1H17L10S1	KSD1V17L10S1
.≌				Super Mirror	KSD1H17L10S2	KSD1V17L10S2
7				Mirror Gold	KSD1H17L10S3	KSD1V17L10S3
			l	Satin Gold	KSD1H17L10S4	KSD1V17L10S4
			Inox Frame	Shine	KSD1H17L10S5	KSD1V17L10S5
				Mirror Bronze	KSD1H17L10S6	KSD1V17L10S6
				Satin Bronze	KSD1H17L10S7	KSD1V17L10S7
				M.Antrachite	KSD1H17L10S8	KSD1V17L10S8
				S.Antrachite	KSD1H17L10S9	KSD1V17L10S9
			Plastic Frame	Satin	KPD1H17L15S1	KPD1V17L15S1
		45 45	Flastic Hairie	Shine	KPD1H17L15S5	KPD1V17L15S5
		15 × 15 cm	Inox Frame	Satin	KSD1H17L15S1	KSD1V17L15S1
				Shine	KSD1H17L15S5	KSD1V17L15S5
		10 × 10 cm	Plastic Frame	Satin	KPD2H17L10S1	KPD2V17L10S1
				Super Mirror	KPD2H17L10S2	KPD2V17L10S2
				Mirror Gold	KPD2H17L10S3	KPD2V17L10S3
				Matte Black	KPD2H17L10S10	KPD2V17L10S10
			Inox Frame	Satin	KSD2H17L10S1	KSD2V17L10S1
Nova				Super Mirror	KSD2H17L10S2	KSD2V17L10S2
6				Mirror Gold	KSD2H17L10S3	KSD2V17L10S3
Z				Matte Black	KSD2H17L10S10	KSD2V17L10S10
				Satin	KPD2H17L15S1	KPD2V17L15S1
			Plastic Frame	Super Mirror	KPD2H17L15S1	KPD2V17L1331
		15 × 15 cm		-		
			Inox Frame	Satin Super Mirror	KSD2H17L15S1	KSD2V17L15S1
				Super Mirror Satin	KSD2H17L15S2 KPD3H17L10S1	KSD2V17L15S2 KPD3V17L10S1
					KPD3H17L10S1	KPD3V17L10S1 KPD3V17L10S2
			Plastic Frame	Super Mirror Mirror Gold		
					KPD3H17L10S3	KPD3V17L10S3
		10 × 10 cm		Matte Black	KPD3H17L10S10	KPD3V17L10S10
Ø				Satin	KSD3H17L10S1	KSD3V17L10S1
Aqua			Inox Frame	Super Mirror	KSD3H17L10S2	KSD3V17L10S2
Ä				Mirror Gold	KSD3H17L10S3	KSD3V17L10S3
7				Matte Black	KSD3H17L10S10	KSD3V17L10S10
			Plastic Frame	Satin	KPD3H17L15S1	KPD3V17L15S1
		15 × 15 cm	1 lastic i fairie	Super Mirror	KPD3H17L15S2	KPD3V17L15S2
			Inox Frame	Satin	KSD3H17L15S1	KSD3V17L15S1
			mox rame	Super Mirror	KSD3H17L15S2	KSD3V17L15S2
ıra		10 × 10 cm	Ceramic Inox Frame	Satin	KSD6H17L10S1	KSD6V17L10S1
Natura		15 × 15 cm	Ceramic Inox Frame	Satin	KSD6H17L15S1	KSD6V17L15S1



Satin S1



Super Mirror S2



Mirror Gold S3



Satin Gold S4



Shine S5



Mirror Bronze S6



Satin Bronze S7




Mirror Antrachite S8



Satin Antrachite S9



Matte Black S10





New Side Outlet Minimal Siphon that is Compatible With All of Our Products




High Flow Input and Output


The Minimal Siphon, which provides high capacity discharge with minimal dimensions, used with all our shower channels, enables high flow. Although minimal in size, it has an high capacity performance. This makes it ideal for narrow and small spaces. Thanks to its custom-designed patented form, it self-cleans dirt and debris using the flow rate of the water. Unlike classical siphons, it prevents the formation of odor originating from the drain with its special water curtain. The integral gasket in the body prevents liquid leakage.





This siphon, according to the TÜV EN-1253 standards, offers high discharge rates with 48 Lt per minute. Its special minimal size makes it is practical for small spaces.





Vertical Siphon with its Patented Special Design Form (Hair and dirt will not pile up)

It specially designed form and high flow rate, it prevents hair and dirt from piling up. S type siphon prevents odor. (Thanks to a water barrier of 25 mm)

Optional Parts That Can Be Used With Our Products

Accessories

Anti-Odor Membran Waterless Trap

After siphon and non-siphon usage, it prevents undesirable odor formation that may occur due to the fact that water has remained in the tank for a long time or dried over time. It also averts insects and bugs that may crawl back from the drains.



Features

Performs high-capacity water discharge. Equipped with an hair & dirt trap which does not hinder the siphon's capacity. It has 40 mm and 50 mm diameter outlet sizes.

Y.8181	40 mm
Y.8155	50 mm

Y.8002 Bottom Outlet Siphon

High capacity bottom outlet siphon that complies with the 100 mm core diameter, thanks to its S structure, offers an absolute solution to the undesired odor leakage problems that may occur with the products equipped with traps.

Features

It prevents odors with its high water discharge capacity of 66 Lt and S structure. No integral seal fluid leaks. It prevents the odor problem caused by drying for a longer time thanks to its 30 mm water curtain and higher amount of water retention.

Y.8002

Spiral Hair Trap

The spiral hair and dirt trap within shower channels on the same level can be removed, cleaned, and reused at any time. Its spiral structure ensures that the hair trapped by the drain is collected without hindering the water flow. There is no decrease in the water discharge flow rate. Fast and easy to clean.



Features

It has 40 mm and 50 mm diameter outlet sizes.

Y.8151	40 mm
H.8084	50 mm



Y.8081

Side Outlet Siphon

It is suitable for high water retention and high flow applications such as waterfall type shower heads. It prevents the odor problem caused by water drying for a longer time.



It prevents odors with its high water discharge capacity of 60 Lt, water curtain of 50 mm, and S structure. No integral seal fluid leaks.

	Height	Water Seal H.	Capacity
Y.8081	h:80mm	50 mm	60 It

LMP 100

Slope and Low Level Profile



With the optional Linearis inclination profile, ponding in the shower area is prevented. A perfect finish and a clean appearance are obtained, while preventing joint contamination caused by dent differences.

*See page 32 for details.



Y.8210

Insulation cuff with diameter Ø50 mm outlet compatible with shower channels and point drains.

Features

It prevents water leaks with its integrated sealing membrane. It helps the creation of a second water drain on the floor concrete. Laminated sealing membrane is compatible with all insulation materials.

Y.8210

Y.8174

Anti-odor trap with flap



Optional trap with flap opens when water comes in, allowing water to drain, while preventing the formation of odor originating from the drain. It prevents insects and bugs crawling back in.





HS.8138

Insulated Moving Flange

Eccentric drain head that can be precisely adjusted in all directions ensures a much easier installation. By moving the eccentric part, you can adjust your installation position.

HS.8138

28





Stainless Steel



Evimetal Technique Profiles

Evimetal offers solutions for the use of stainless steel technical profiles, ceramics and different coating materials. It also offers ideal combinations with the functionalities and designs of technical profiles. Offering a wide product range, different options, and dimensions compatible with different thicknesses, Evimetal technical profiles are the ideal choice for your new construction and renovation projects.

Evimetal profiles offer many combinations thanks to their functionality and designs. It answers many needs including transition from one material to another, corner finishes, wall, floor, stair finishes, floor to glass profiles. The protective film on the products protects your profile until the application is completed. It is up to you to shape your living space with angled cut ceramics, dual multi-use interior and exterior corner transitions, and different height transitions. It ensures perfect finishes where used. As you increase the durability of your flooring, you can easily use Evimetal profiles to obtain a more attractive appearance.

Wide Range of Colors


- -Evimetal products are available in 9 surface alternatives. You can also have your needs tailor-made.
- -Titanium PVD is used on gold, bronze and antracite surfaces.
- -The protective film on them should not be removed until the application is completed. Chemicals should not be used during cleaning and use.
- -Surface alternatives in 244 cm profile options are; Super Mirror, Mirror Gold, Mirror Bronze, Mirror Antracite and color matte.
- -Surface alternatives in 250 cm profile options are Satin and Shine. Profile production up to 300 cm is available.

Please refer to your sales consultant for any technical questions about the solutions specially designed for your project, as well as the areas of use.

- *Minimal changes may occur in color shades depending on the raw material pigment changes in production.
- *In custom-made profiles, orders must be placed after calculating the ceramic height, and adhesive difference.
- *In custom-made profiles, customer's approval is important because return or exchange the product is not available.









	LMP.	100 Tilted S.P.	Left		cm	Left			cm	Right		cm	Right	cm
	Satin	S.I	LMP.L.100.1250.1.S.I			LMP.L.100.25	00.1	.S.I	250	LMP.R.100.1250.1.S.I		125	LMP.R.100.2500.1.S.I	250
ode	Mirro	S.M	LMP.L.100.	1250.2.S.M	122	LMP.L.100.25	00.2	2.S.M	244	LMP.R.100.1250.2.S.	М	122	LMP.R.100.2500.2.S.M	244
Ŏ/	Gold	Gold M.G LMP.L.100.1250.3.M.G		122	LMP.L.100.25	00.3	B.M.G	244	LMP.R.100.1250.3.M	.G	122	LMP.R.100.2500.3.M.G	244	
lno	LMP.120 Frontal Cover Profile													
				Satin			cm	Mirror			cm	Mirro	or Gold	cm
		28 mm Frontal Cove		LMP.120.2500.1	MP.120.2500.1.S.I		250	LMP.120).250	0.2.S.M	250	LMP.1	20.2500.3.M.G	244

^{*}When placing your orders, use the R code (right) to be used on your right side and L code (left) for the profile to be used on your left side, when you stand facing the drain.


$\mathsf{PRF}\ \mathsf{100}\ \mathsf{L}\ \mathsf{shape}\ \mathsf{outer}\ \mathsf{edge}\ \mathsf{profile}$

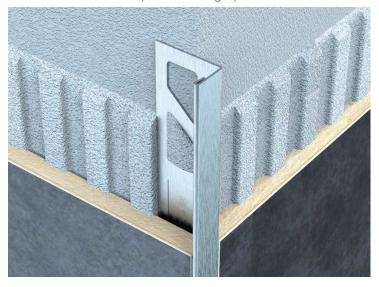




			6 mm	8 mm	10 mm	12 mm
	Satin	S.I	PRF.100.6.2500.1.S.I	PRF.100.8.2500.1.S.I	PRF.100.10.2500.1.S.I	PRF.100.12.2500.1.S.I
	Super Mirror	S.M	PRF.100.6.2440.2.S.M	PRF.100.8.2440.2.S.M	PRF.100.10.2440.2.S.M	PRF.100.12.2440.2.S.M
l e	Mirror Gold	M.G	PRF.100.6.2440.3.M.G	PRF.100.8.2440.3.M.G	PRF.100.10.2440.3.M.G	PRF.100.12.2440.3.M.G
ő	Satin Gold	S.G	PRF.100.6.2440.4.S.G	PRF.100.8.2440.4.S.G	PRF.100.10.2440.4.S.G	PRF.100.12.2440.4.S.G
×o	Shine	S.P	PRF.100.6.2500.5.S.P	PRF.100.8.2500.5.S.P	PRF.100.10.2500.5.S.P	PRF.100.12.2500.5.S.P
=	Mirror Bronze	M.B	PRF.100.6.2440.6.M.B	PRF.100.8.2440.6.M.B	PRF.100.10.2440.6.M.B	PRF.100.12.2440.6.M.B
	Satin Bronze	S.B	PRF.100.6.2440.7.S.B	PRF.100.8.2440.7.S.B	PRF.100.10.2440.7.S.B	PRF.100.12.2440.7.S.B
	M. Antracite	M.A	PRF.100.6.2440.8.M.A	PRF.100.8.2440.8.M.A	PRF.100.10.2440.8.M.A	PRF.100.12.2440.8.M.A
L	S.Antracite	S.A	PRF.100.6.2440.9.S.A	PRF.100.8.2440.9.S.A	PRF.100.10.2440.9.S.A	PRF.100.12.2440.9.S.A

^{*0.6} mm available for your project needs.

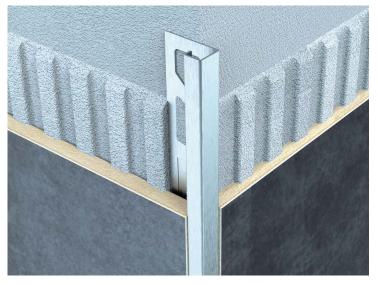









Color	F.401	F.402
Alternatives		Satin
for finish	Super	r Mirror
parts	Mirr	or Gold


Г			6 mm	8 mm	10 mm	12 mm
	Satin	S.I	PRF.400.6.2500.1.S.I	PRF.400.8.2500.1.S.I	PRF.400.10.2500.1.S.I	PRF.400.12.2500.1.S.I
	Super Mirror	S.M	PRF.400.6.2440.2.S.M	PRF.400.8.2440.2.S.M	PRF.400.10.2440.2.S.M	PRF.400.12.2440.2.S.M
e	Mirror Gold	M.G	PRF.400.6.2440.3.M.G	PRF.400.8.2440.3.M.G	PRF.400.10.2440.3.M.G	PRF.400.12.2440.3.M.G
ő	Satin Gold	S.G	PRF.400.6.2440.4.S.G	PRF.400.8.2440.4.S.G	PRF.400.10.2440.4.S.G	PRF.400.12.2440.4.S.G
×	Shine	S.P	PRF.400.6.2500.5.S.P	PRF.400.8.2500.5.S.P	PRF.400.10.2500.5.S.P	PRF.400.12.2500.5.S.P
=	Mirror Bronze	M.B	PRF.400.6.2440.6.M.B	PRF.400.8.2440.6.M.B	PRF.400.10.2440.6.M.B	PRF.400.12.2440.6.M.B
	Satin Bronze	S.B	PRF.400.6.2440.7.S.B	PRF.400.8.2440.7.S.B	PRF.400.10.2440.7.S.B	PRF.400.12.2440.7.S.B
	M.Antracite	M.A	PRF.400.6.2440.8.M.A	PRF.400.8.2440.8.M.A	PRF.400.10.2440.8.M.A	PRF.400.12.2440.8.M.A
L	S.Antracite	S.A	PRF.400.6.2440.9.S.A	PRF.400.8.2440.9.S.A	PRF.400.10.2440.9.S.A	PRF.400.12.2440.9.S.A

^{*0.6} mm available for your project needs.

$PRF\ 470\ \text{parquet tile joint profile}$

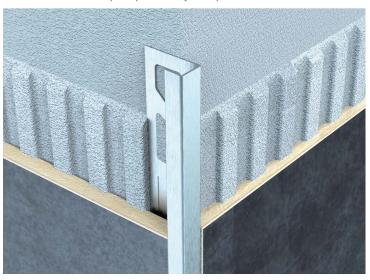









Color	F.401	F.402
Alternatives		Satin
for finish	Super	Mirror
parts	Mirro	or Gold

Г			6 mm	8 mm	10 mm	12 mm
	Satin	S.I	PRF.470.6.2500.1.S.I	PRF.470.8.2500.1.S.I	PRF.470.10.2500.1.S.I	PRF.470.12.2500.1.S.I
	Super Mirror	S.M	PRF.470.6.2440.2.S.M	PRF.470.8.2440.2.S.M	PRF.470.10.2440.2.S.M	PRF.470.12.2440.2.S.M
<u>و</u>	Mirror Gold	M.G	PRF.470.6.2440.3.M.G	PRF.470.8.2440.3.M.G	PRF.470.10.2440.3.M.G	PRF.470.12.2440.3.M.G
ő	Satin Gold	S.G	PRF.470.6.2440.4.S.G	PRF.470.8.2440.4.S.G	PRF.470.10.2440.4.S.G	PRF.470.12.2440.4.S.G
×	Shine	S.P	PRF.470.6.2500.5.S.P	PRF.470.8.2500.5.S.P	PRF.470.10.2500.5.S.P	PRF.470.12.2500.5.S.P
=	Mirror Bronze	M.B	PRF.470.6.2440.6.M.B	PRF.470.8.2440.6.M.B	PRF.470.10.2440.6.M.B	PRF.470.12.2440.6.M.B
	Satin Bronze	S.B	PRF.470.6.2440.7.S.B	PRF.470.8.2440.7.S.B	PRF.470.10.2440.7.S.B	PRF.470.12.2440.7.S.B
	M.Antracite	M.A	PRF.470.6.2440.8.M.A	PRF.470.8.2440.8.M.A	PRF.470.10.2440.8.M.A	PRF.470.12.2440.8.M.A
	S.Antracite	S.A	PRF.470.6.2440.9.S.A	PRF.470.8.2440.9.S.A	PRF.470.10.2440.9.S.A	PRF.470.12.2440.9.S.A

^{*0.6} mm available for your project needs.







			15 mm	26 mm
	Satin	S.I	PRF.790.15.2500.1.S.I	PRF.790.26.2500.1.S.I
	Super Mirror	S.M	PRF.790.15.2440.2.S.M	PRF.790.26.2440.2.S.M
l e	Mirror Gold	M.G	PRF.790.15.2440.3.M.G	PRF.790.26.2440.3.M.G
ő	Satin Gold	S.G	PRF.790.15.2440.4.S.G	PRF.790.26.2440.4.S.G
×	Shine	S.P	PRF.790.15.2500.5.S.P	PRF.790.26.2500.5.S.P
=	Mirror Bronze	M.B	PRF.790.15.2440.6.M.B	PRF.790.26.2440.6.M.B
	Satin Bronze	S.B	PRF.790.15.2440.7.S.B	PRF.790.26.2440.7.S.B
	M.Antracite	M.A	PRF.790.15.2440.8.M.A	PRF.790.26.2440.8.M.A
	S.Antracite	S.A	PRF.790.15.2440.9.S.A	PRF.790.26.2440.9.S.A

^{*0.6} mm available for your project needs.

$PRF\ 760\ stepless\ transition\ profile$








_			
Γ.	oe O		32 mm
	Satin	S.I	PRF.760.32.2500.1.S.I
	Super Mirror	S.M	PRF.760.32.2440.2.S.M
	Mirror Gold	M.G	PRF.760.32.2440.3.M.G

Thickness: 1.5 mm







			8 mm	10 mm	12 mm	14 mm
	Satin	S.I	PRF.500.8.2500.1.S.I	PRF.500.10.2500.1.S.I	PRF.500.12.2500.1.S.I	PRF.500.14.2500.1.S.I
	Super Mirror	S.M	PRF.500.8.2440.2.S.M	PRF.500.10.2440.2.S.M	PRF.500.12.2440.2.S.M	PRF.500.14.2440.2.S.M
l e	Mirror Gold	M.G	PRF.500.8.2440.3.M.G	PRF.500.10.2440.3.M.G	PRF.500.12.2440.3.M.G	PRF.500.14.2440.3.M.G
lö	Satin Gold	S.G	PRF.500.8.2440.4.S.G	PRF.500.10.2440.4.S.G	PRF.500.12.2440.4.S.G	PRF.500.14.2440.4.S.G
×	Shine	S.P	PRF.500.8.2500.5.S.P	PRF.500.10.2500.5.S.P	PRF.500.12.2500.5.S.P	PRF.500.14.2500.5.S.P
=	Mirror Bronze	M.B	PRF.500.8.2440.6.M.B	PRF.500.10.2440.6.M.B	PRF.500.12.2440.6.M.B	PRF.500.14.2440.6.M.B
	Satin Bronze	S.B	PRF.500.8.2440.7.S.B	PRF.500.10.2440.7.S.B	PRF.500.12.2440.7.S.B	PRF.500.14.2440.7.S.B
	Mirror Antracite	M.A	PRF.500.8.2440.8.M.A	PRF.500.10.2440.8.M.A	PRF.500.12.2440.8.M.A	PRF.500.14.2440.8.M.A
L	Satin Antracite	S.A	PRF.500.8.2440.9.S.A	PRF.500.10.2440.9.S.A	PRF.500.12.2440.9.S.A	PRF.500.14.2440.9.S.A

^{*0.6} mm available for your project needs.

$PRF\ 200\ \ \text{external outer corner edge protection profile}$

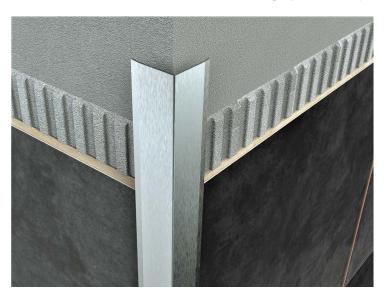




Г			16 mm	32 mm
	Satin	S.I	PRF.200.16.2500.1.S.I	PRF.200.32.2500.1.S.I
	Super Mirror	S.M	PRF.200.16.2440.2.S.M	PRF.200.32.2440.2.S.M
de	Mirror Gold	M.G	PRF.200.16.2440.3.M.G	PRF.200.32.2440.3.M.G
ox / Co	Satin Gold	S.G	PRF.200.16.2440.4.S.G	PRF.200.32.2440.4.S.G
	Shine	S.P	PRF.200.16.2500.5.S.P	PRF.200.32.2500.5.S.P
-	Mirror Bronze	M.B	PRF.200.16.2440.6.M.B	PRF.200.32.2440.6.M.B
	Satin Bronze	S.B	PRF.200.16.2440.7.S.B	PRF.200.32.2440.7.S.B
	Mirror Antracite	M.A	PRF.200.16.2440.8.M.A	PRF.200.32.2440.8.M.A
	Satin Antracite	S.A	PRF.200.16.2440.9.S.A	PRF.200.32.2440.9.S.A

^{*0.6} mm available for your project needs.

$B\ 907$ decorative profil






1			15 mm	23 mm	30 mm	50 mm
1	0	Satin S.I	PRF.907.15.2500.1.S.I	PRF.907.23.2500.1.S.I	PRF.907.30.2500.1.S.I	PRF.907.50.2500.1.S.I
I.	Sod	Super Mirror S.M	PRF.907.15.2440.2.S.M	PRF.907.23.2440.2.S.M	PRF.907.30.2440.2.S.M	PRF.907.50.2440.2.S.M
loû	\mathbb{I}	Mirror Gold M.G	PRF.907.15.2440.3.M.G	PRF.907.23.2440.3.M.G	PRF.907.30.2440.3.M.G	PRF.907.50.2440.3.M.G
	2	Mirror Bronze M.B	PRF.907.15.2440.6.M.B	PRF.907.23.2440.6.M.B	PRF.907.30.2440.6.M.B	PRF.907.50.2440.6.M.B
		Mirror Antrachite M.A	PRF.907.15.2440.8.M.A	PRF.907.23.2440.8.M.A	PRF.907.30.2440.8.M.A	PRF.907.50.2440.8.M.A

B 908 decorative profile







10~15~23~	30	
	9	8,8

Г			10 mm	15 mm	23 mm	30 mm
	Satin	S.I	PRF.908.10.2500.1.S.I	PRF.908.15.2500.1.S.I	PRF.908.23.2500.1.S.I	PRF.908.30.2500.1.S.I
	Super Mirror	S.M	PRF.908.10.2440.2.S.M	PRF.908.15.2440.2.S.M	PRF.908.23.2440.2.S.M	PRF.908.30.2440.2.S.M
l e	Mirror Gold	M.G	PRF.908.10.2440.3.M.G	PRF.908.15.2440.3.M.G	PRF.908.23.2440.3.M.G	PRF.908.30.2440.3.M.G
ő	Satin Gold	S.G	PRF.908.10.2440.4.S.G	PRF.908.15.2440.4.S.G	PRF.908.23.2440.4.S.G	PRF.908.30.2440.4.S.G
×o	Shine	S.P	PRF.908.10.2500.5.S.P	PRF.908.15.2500.5.S.P	PRF.908.23.2500.5.S.P	PRF.908.30.2500.5.S.P
<u>-</u>	Mirror Bronze	M.B	PRF.908.10.2440.6.M.B	PRF.908.15.2440.6.M.B	PRF.908.23.2440.6.M.B	PRF.908.30.2440.6.M.B
	Satin Bronze	S.B	PRF.908.10.2440.7.S.B	PRF.908.15.2440.7.S.B	PRF.908.23.2440.7.S.B	PRF.908.30.2440.7.S.B
	Mirror Antracite	M.A	PRF.908.10.2440.8.M.A	PRF.908.15.2440.8.M.A	PRF.908.23.2440.8.M.A	PRF.908.30.2440.8.M.A
L	Satin Antracite	S.A	PRF.908.10.2440.9.S.A	PRF.908.15.2440.9.S.A	PRF.908.23.2440.9.S.A	PRF.908.30.2440.9.S.A

The 0.8 mm specially designed patented reverse angled channel feature draws attention.

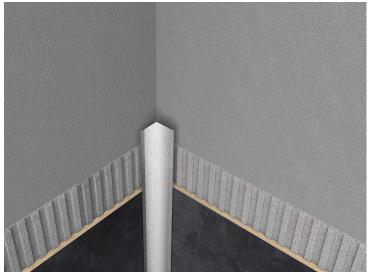







_				
			16 mm	32 mm
	Satin	S.I	PRF.240.16.2500.1.S.I	PRF.240.32.2500.1.S.I
	Super Mirror	S.M	PRF.240.16.2440.2.S.M	PRF.240.32.2440.2.S.M
ge	Mirror Gold	M.G	PRF.240.16.2440.3.M.G	PRF.240.32.2440.3.M.G
l o	Satin Gold	S.G	PRF.240.16.2440.4.S.G	PRF.240.32.2440.4.S.G
ŏ	Shine	S.P	PRF.240.16.2500.5.S.P	PRF.240.32.2500.5.S.P
-	Mirror Bronze	М.В	PRF.240.16.2440.6.M.B	PRF.240.32.2440.6.M.B
	Satin Bronze	S.B	PRF.240.16.2440.7.S.B	PRF.240.32.2440.7.S.B
	Mirror Antracite	M.A	PRF.240.16.2440.8.M.A	PRF.240.32.2440.8.M.A
L	Satin Antracite	S.A	PRF.240.16.2440.9.S.A	PRF.240.32.2440.9.S.A

^{*0.6} mm available for your project needs.

$PRF\ 840$ inner corner edge rounded profile

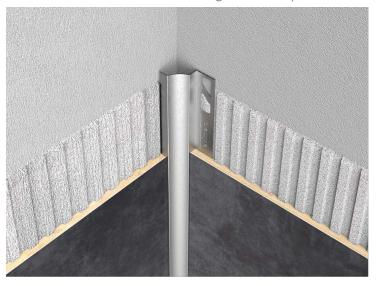






	atin
for finish part S	hine

ode		10 mm	12 mm
Įŏ,	Satin S.I	PRF.840.10.2500.1.S.I	PRF.840.12.2500.1.S.I
lou	Shine S.P	PRF.840.10.2500.5.S.P	PRF.840.12.2500.5.S.P

PRF 140 dilatation profile








ode			8 mm	10 mm	12 mm	14 mm
lŏ/×	Satin	S.I	PRF.140.8.2500.1.S.I	PRF.140.10.2500.1.S.I	PRF.140.12.2500.1.S.I	PRF.140.14.2500.1.S.I
log	Shine	S.P	PRF.140.8.2500.5.S.P	PRF.140.10.2500.5.S.P	PRF.140.12.2500.5.S.P	PRF.140.14.2500.5.S.P

 ${\sf PRF}\ 600$ internal stairs edge protection profile








ode	3		10 mm	12 mm	14 mm
Į×	Satin	S.I	PRF.600.10.2500.1.S.I	PRF.600.12.2500.1.S.I	PRF.600.14.2500.1.S.I
Ino	Shine	S.P	PRF.600.10.2500.1.S.P	PRF.600.12.2500.1.S.P	PRF.600.14.2500.1.S.P








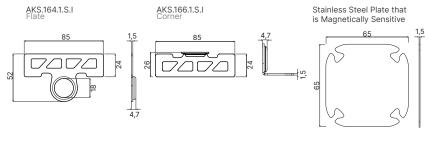

_	Flat Cover Holder	AKS.164.1.S.I
Sa	Corner Cover Holder	AKS.166.1.S.I

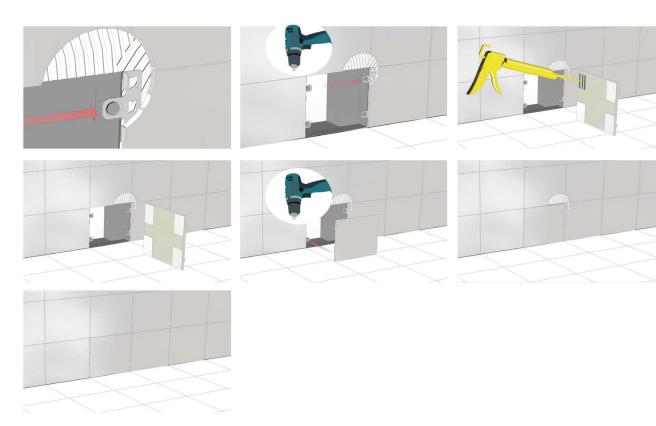


*Follow the steps

Tower Rails Stainless Steel





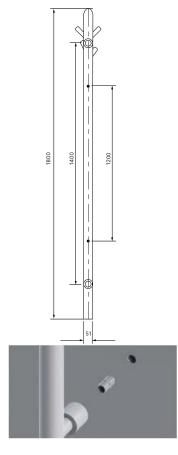

PPRC connecting pipe diameter should be 1/2, next to the wall, and have internal thread. (Such as faucet connections)

:=	Central System	TR.1800.2.S.M.C
	With Electric	TR.1800.2.S.M.E

height	Dimensions length mm	depth	Pipe centre mm	Pipe centre to wall mm	Wall distance mm	Fixing center mm	Number of pipe unit	Pipe/Profile dimensions mm	Fuel E/C/D	Thermal btu	Power watt
1800	51	145	1400	50	100	1200	1	51	E/C	992	291

Valves cannot be used in Trea towel warmers. Axle distances are indicated in the table.


PPRC connecting pipe diameter should be 1/2, next to the wall, and have internal thread. (Such as faucet connections)

Max working pressure 4 bar/E: Electricity / C: to the Central Installation

Please install by following the steps on the visual

Arden



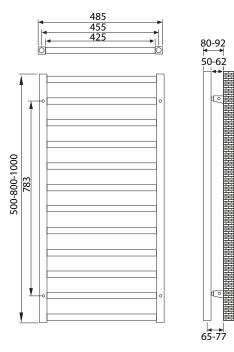



*Valves are not included in the towel warmer price.



*Additional fees apply.

-=	Central System	AR.800.500.2.S.M.C
	Central System	AR.1000.500.2.S.M.C

height	Dimesions length mm	depth	Pipe centre mm	Pipe centre to wall mm	Wall distance mm	Fixing center mm	Number of pipe adet	Pipe/Profile dimensions mm	Fuel E/C/D	Thermal btu	Power watt
800	485	30	455	80-95	95-110	580	9	20-20/30-30	E/C	825	242
height	Boyut length mm	depth	Pipe centre mm	Pipe centre to wall mm	Wall distance mm	Fixing center mm	Number of pipe adet	Pipe/Profile dimensions mm	Fuel E/C/D	Thermal btu	Power watt
1000	485	30	455	80-95	95-110	780	12	20-20/30-30	E/C	1100	323

1.S.I Satin surface/ 2.S.M Mirror surface / 3.M.G. Mirror gold surface
Axle distances are given according to the dimensions of Evimetal stainless valves. Valve and accessories are not included in the price.


Krosnik pipe diameter should be 15-16 mm, and accessory PPRC connection pipe diameter should be 1/2 and next to the wall. (Such as faucet connections)

Max working pressure 4 bar/E: Electricity / C: to the Central Installation

Please install by following the steps on the visual





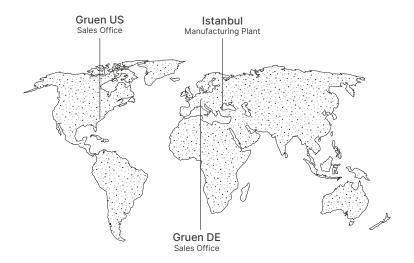

+90 212 475 84 88 info@evimetal.com.tr www.evimetal.com.tr

Yassıören Mah. Hadımköy Cad. Akpınar Sanayi Bölgesi No:178 34555, Arnavutköy - Istanbul

> +49 (0) 6161 5984999 info@gruen-systems.de www.gruen-systems.de

Steinmauerstr. 2 64395, Brensbach - Deutschland